


4. Hood Lights

The hood light fixtures must be kept dry. Water inside a light fixture will create a short on the circuit and damage the Melink Processor, which powers the lights.




5. Top of Hood

On top of the hood, one will find Air Purge Units (APU), temperature probes, and a network of control cables. The top of the hood is not normally cleaned, so water exposure should not be an issue. If anyone needs to be on top of the hood for any reason, they must be careful not to step on any of these components.

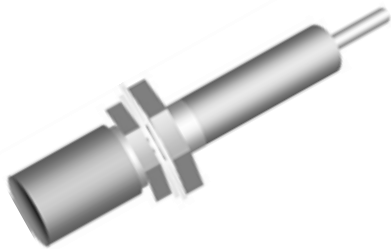

Temperature Probe

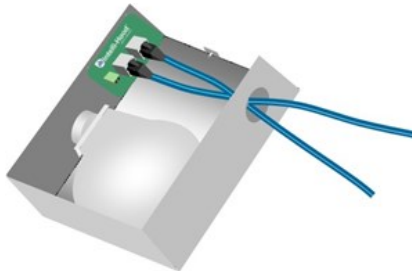

Air Purge Unit

6. Rooftop Fan Disconnect Switch

The safety disconnect switch for each exhaust fan on top of the roof must be kept dry. This disconnect switch may be mounted on the side of the fan or inside the top cover. Water inside the disconnect switch will cause the VFD to trip, and it will be unable to run the motor. If this occurs, an electrician must be called out to clean or replace the disconnect switch.



Fan Disconnect Switch